



PHONO

SOLAR EPOCH

615-635w Draco Module Series

N-TOPCON HIGH EFFICIENCY MONO BM6-16B-G

Bloomberg
NEW ENERGY FINANCE

Tier1



Extraordinary Product Performance


- Up to 30% additional power yield benefited from bifacial technology and over 80% cell bifaciality
- Competitive high-temperature performance with ameliorated temperature coefficient
- Better weak illumination response, higher power generation with N-TOPCon technology

Higher Quality Reliability

- Zero Light Induced Degradation(LID), can increase power generation
- Industry-leading cell processing technology and dual glass contributes to excellent anti-PID characteristic
- First-year degradation is less than 1.0%, with linear degradation of 0.4% per year for 30 years

Wider Application Conditions

- BIPV, vertical installation, snowfield, high-humid area, windy and dusty area
- Safer and easier handling during transportation and installation

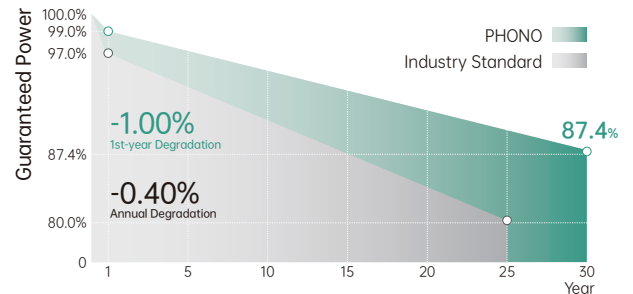

15-year
Product Warranty

30-year
Linear Performance Warranty

MANAGEMENT SYSTEM CERTIFICATES

IEC 61215, IEC 61730

ISO 9001
2015 / Quality management system

ISO 14001
2015 / Standards for environmental management system

ISO 45001
2018 / International standards for occupational health & safety



Electrical Typical Values

Model	PS615M8GFH-26/RNH		PS620M8GFH-26/RNH		PS625M8GFH-26/RNH		PS630M8GFH-26/RNH		PS635M8GFH-26/RNH	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Testing Condition	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Rated Power (Pmpp)	615	471	620	475	625	479	630	482	635	486
Rated Current (Impp)	13.44	10.82	13.50	10.87	13.56	10.92	13.62	10.97	13.68	11.02
Rated Voltage (Vmpp)	45.76	43.50	45.93	43.66	46.09	43.82	46.26	43.98	46.32	44.13
Short Circuit Current (Isc)	14.11	11.36	14.19	11.43	14.27	11.49	14.35	11.56	14.42	11.61
Open Circuit Voltage (Voc)	55.46	53.10	55.60	53.24	55.74	53.37	55.88	53.51	56.01	53.63
Module Efficiency (%)	22.00		22.18		22.36		22.54		22.72	

STC (Standard Testing Conditions): Irradiance 1000W/m², AM 1.5, Cell Temperature 25°C

NOCT (Nominal Operation Cell Temperature): Irradiance 800W/m², Ambient Temperature 20°C, Spectra at AM1.5, Wind at 1m/s

BSTC

Maximum Power (Pmax)	675	680	685	690	695
Optimum Operating Current (Impp)	14.75	14.81	14.86	14.92	15.00
Optimum Operating Voltage (Vmpp)	45.76	45.93	46.09	46.26	46.32
Short Circuit Current (Isc)	15.41	15.48	15.56	15.63	15.71
Open Circuit Voltage (Voc)	55.46	55.60	55.74	55.88	56.01

BSTC: Front side irradiation 1000W/m², back side reflection irradiation 135W/m², AM 1.5, ambient temperature 25°C

Mechanical Characteristics

Cell Type	N Type Monocrystalline
Dimension (L × W × H)	Length: 2465mm (97.05 inch)
	Width: 1134mm (44.65 inch)
	Height: 35mm (1.38 inch)
Weight	35.0kg (77.16 lbs)
Glass	2.0mm/2.0mm toughened glass
Frame	Anodized Aluminium Alloy
Cable (Including Connector)	4mm ² (IEC), (+): 450mm, (-): 250mm or Customized Length

Temperature Ratings

Voltage Temperature Coefficient	-0.25%/°C
Current Temperature Coefficient	+0.04%/°C
Power Temperature Coefficient	-0.29%/°C
Power Tolerance	0~+3%
NOCT	42±2°C
Bifaciality	80±5%




Absolute Maximum Rating

Operating Temperature	From -40 to + 85°C
Hail Diameter @ 80km/h	Up to 25mm
Front Side Maximum Static Loading	5400Pa
Rear Side Maximum Static Loading	2400Pa
Maximum Series Fuse Rating	30A
PV Module Classification	II
Fire Rating (IEC61730)	C
Maximum System Voltage	DC 1500V

Packing Configuration

Container	40' HQ
Pieces/Container	558
Pcs/Pallet	31
Pallets/Container	18

Electrical Characteristics

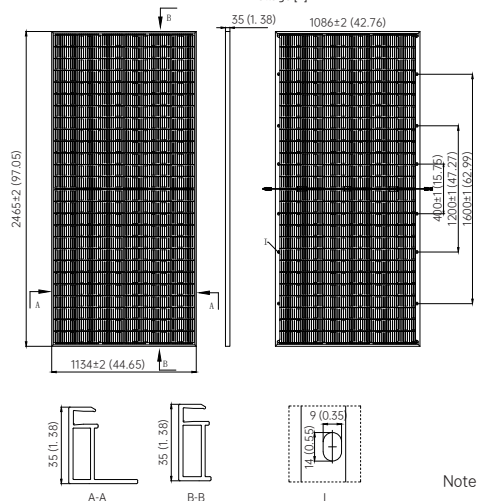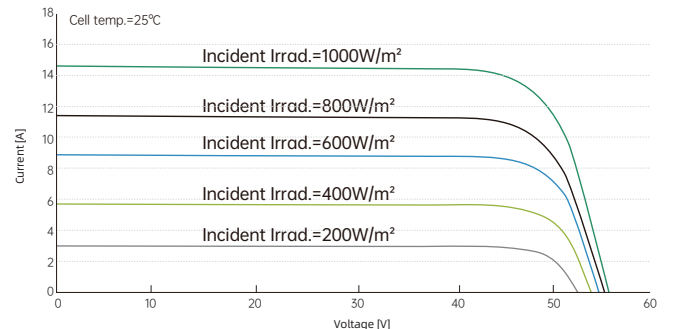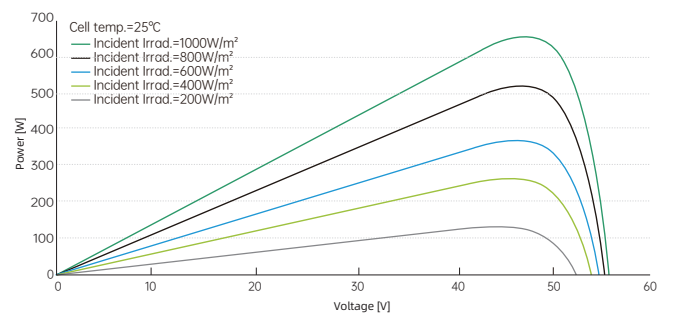

Note:mm (inch)